


Trådspik sänkhuvud

DIN 1151 DIN-EN 10230

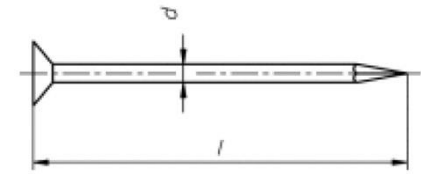

d	1,6	1,8	2,0	2,2	2,2	2,5	2,8	3,1	3,1	3,4	3,4	4,2	4,2	5,5	5,5	6	7
l	30	35	40	50	55	60	65	65	70	80	90	100	120	140	160	180	210