


## Lins-flänsskruvar med innersexkant 10.9

<b>d</b>	<b>M 5</b>	<b>M 6</b>	<b>M 8</b>
A	11,8	13,6	17,8
k	2,75	3,3	4,4
s	3	4	5

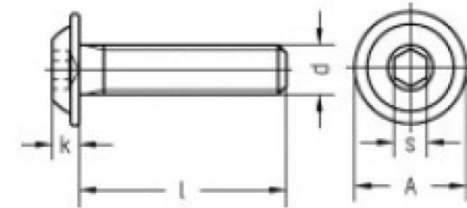

<b>Linskruvar ISO 7381 (innersexkant)</b>		
<b>Diameter</b>	<b>Bits/ stiftnyckel NV</b>	<b>Best.nr Bits</b>
5	SW 3	55.13.263
6	SW 4	55.13.264
8	SW 5	55.13.265